


3 simple steps to configure the optional Stopper for your HDMI cable.

1. Measure HDMI cable with included Wire/Stopper Gauge Tool to determine the correct inserts to use with the stopper. Ensure that you have a snug fit. Reference gauge number for next step.

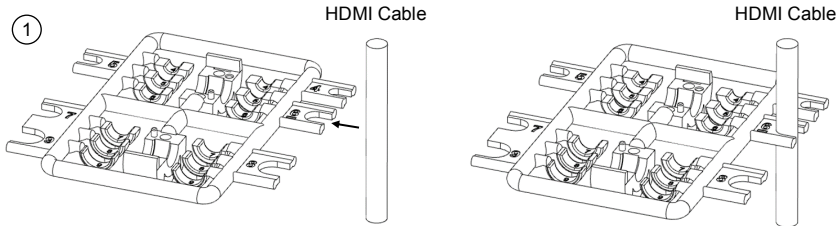

Steps 2 and 3 on the reverse side.

Universal 4K HDMI® Adapter Ring Optional Stopper

Quick Start Guide

2. Select the corresponding insert number that matches the gauge tool number and install in stopper.
Example: If the gauge tool is 6, select the two 6 inserts and install in each side of the stopper.
Example Hint: If the cable happens to have a size in between 5 (too tight) and 6 (too loose), you can use one 5 insert and one 6 insert for best fit.
3. Clamp the stopper to the HDMI cable and tighten with the provided black metal screws.

